


## VOLUME PHASE HOLOGRAPHIC TRANSMISSION GRATINGS


### HD 1145 l/mm at 1310 nm

Our patented HD gratings have a wider bandwidth than conventional volume phase holographic gratings. This one is popular for OCT (Optical Coherence Tomography) and other applications in the region of 1310 nm. They are created by using coherent laser light to write the interference pattern in dichromated gelatin. After processing, the grating is capped with a protective glass cover and then AR coated. The results are a grating with low scatter, high diffraction efficiency, and low wavefront distortion. The grating is durable and can be cleaned using the same methods to clean other AR coated optics.

Transmission Grating Geometry

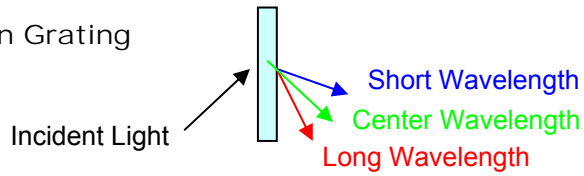

HD Grating 1145 l/mm 1310 nm CWL 48.6 deg AOI = AOD

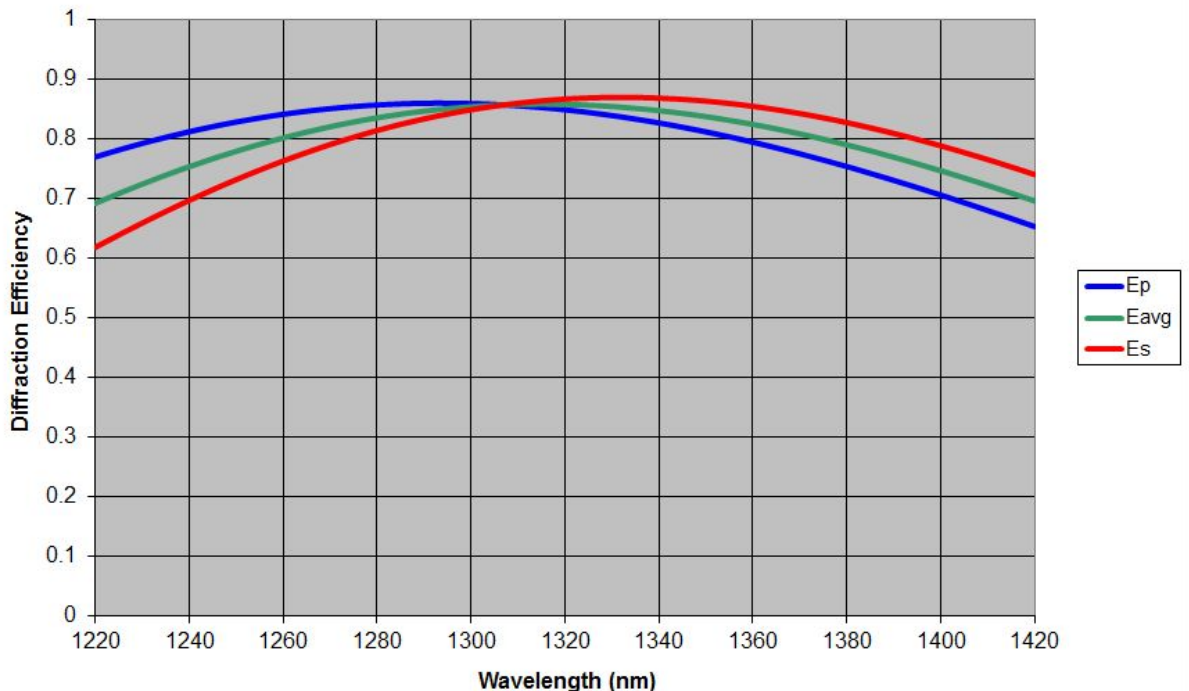

# SPECIFICATIONS

General	
Surface quality	60-40 scratch-dig
Diffracted Wavefront	$< \lambda/5$ rms @ 632.8 nm
Spatial Frequency	1145 l/mm +/- 0.5 l/mm
CWL	1310 nm
Angle of Incidence (AOI)	48.6° @ 1310 nm
Thickness Tolerance	+/- 0.25
Dimension Tolerance	+0/-0.15
Lines Perpendicular to B	0.15°
Chamfers	0.25-0.75 mm face width
Chamfers Angle/Tolerance	45° +/-15°
AR Coating	< 0.5% Reflection; 1220 nm - 1420 nm
Substrate and Cover glass	3 mm BK7 6 mm total thickness
Clear Aperture	30 mm x 40 mm
Dimensions	A=35 mm B=45 mm T=6 mm

