

To request any additional information please contact us at:

Email: [sales@axcelphotonics.com](mailto:sales@axcelphotonics.com)

Phone: (508) 481-9200

## Features

- Up to 8 W CW output power.
- High Quality, Reliability, & Performance

## Applications

- Fiber Lasers
- Material Processing
- Graphics
- Defense
- Medical

## Product Specifications

### 975 nm Multi-Mode Laser Diodes 90 μm (8 W)

#### Description:

High brightness, high quality, and high reliability are the foundation of our multi mode product line. Axcel's 975 nm multi mode laser diodes are available with up to 8 W of continuous output power from a 90 μm single emitter chip. Axcel's trademark laser chip design creates un-measurable degradation and long lifetimes that make our chips among the most reliable in the industry today. Our 975 nm multi mode line serves a broad range of applications including fiber lasers, material processing, graphics, defense, and medical.




#### Standard Product Specifications for 915nm Multi-mode Diodes

Parameter	Unit
Wavelength	nm
Wavelength @ 1.0 A	nm
Spectrum FWHM	nm
Operating Power (P <sub>o</sub> )	W
Operating Current (I <sub>o</sub> )	A
Operating Voltage (V <sub>o</sub> )	V
Vertical Far Field	deg, FWHM
Vertical Far Field @ 1.0 A	deg, FWHM
Parallel Far Field	deg, FWHM
Parallel Far Field @ 1.0 A	deg, FWHM
Threshold (I <sub>th</sub> )	mA
Slope Efficiency (dL/dI)	W/A
Slope Efficiency (dL/dI) @ 1.0 A	W/A
Lifetime @ Pop and 25°C	hours
Storage Temp.	°C
Operating Temp. (T <sub>op</sub> )	°C
Lead Soldering Temp. (<5 sec)	°C

8 W Series		
Min	Typ	Max
970	975	980
962	965	968
—	2	4
—	8.0	—
—	9.2	10
—	1.7	1.9
—	35	40
—	35	40
—	8	10
—	4	6
—	800	900
0.85	0.95	—
0.85	0.95	—
100,000	—	—
-40	—	80
-20	25	50
—	—	250

- Note:
- 1) Specifications are subject to change without notice.
  - 2) All Axcel Photonics products are TE polarized
  - 3) All Specifications are rated at 25°C
  - 4) 1.0 A Specifications are given as a reference. Specifications at typical operating current can vary depending on the quality of the bonding and thermal transfer between C4-mount and heatsink.

**975nm 8W 90um Device Performance Data Graphs:**

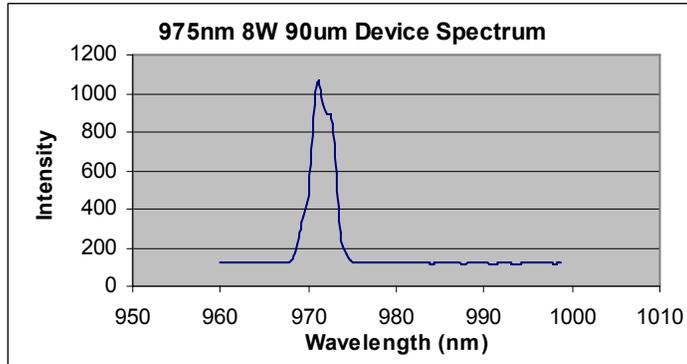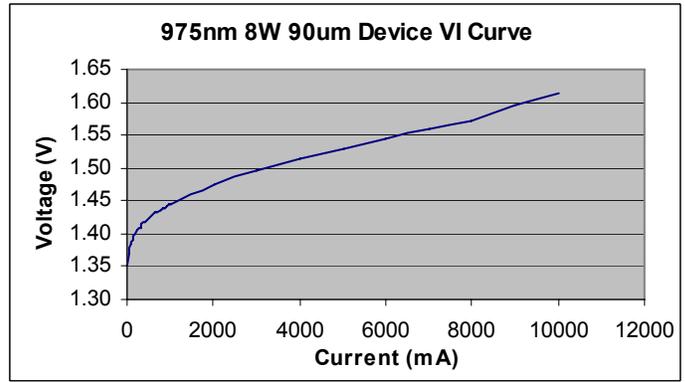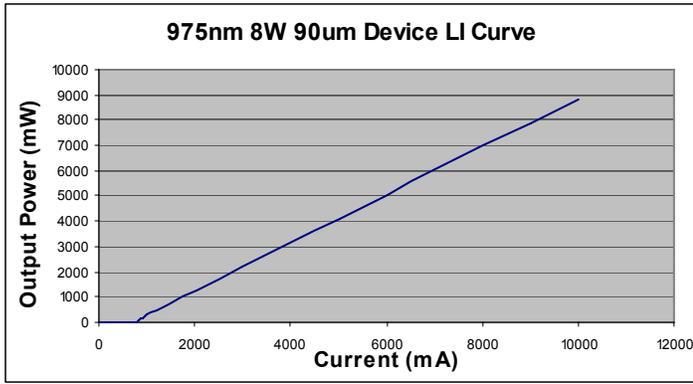

**Determining Your Product number:**

MM—WWW—PPP—XYZ—(custom add-ons)

**Package:**

CL 4.3 mm C-mount

**X Option (aperture size)**

1 90 μm aperture

**8 W Series**

CL-975-8000-150

**Wavelength:**

975 975 nm

**Y Option (wavelength tolerance)**

5 ±5 nm

**Power Options:**

8000 8 W

**Z Option (additional options)**

0 none

Please note: These are our standard product configurations. Other options may be available, please inquire about any additional options that you may require when contacting our Sales Team.

**Safety**

Caution: Laser light emitted from any diode laser is invisible and may be harmful to the human eye. Avoid looking directly into the diode laser aperture when the device is in operation.

Note: The use of optical instruments with this product will increase eye hazard.


**ESD Caution**

Always handle diode lasers with extreme care to prevent electrostatic discharge, the primary cause of unexpected diode failure. You can prevent ESD by always wearing wrist straps, grounding all applicable work surfaces, and following extremely rigorous anti-static techniques when handling diode lasers.

**Operating Considerations**

Operating the diode laser outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum peak optical power cannot be exceeded. CW diode lasers may be damaged by excessive drive current or switching transients. When using power supplies, the diode laser should be connected with the main power on and the output voltage at zero. The current should be increased slowly while monitoring the diode laser output power and the drive current. Device degradation accelerates with increased temperature, and therefore careful attention to minimize the case temperature is advised. A proper heat-sink for the diode laser on a thermal radiator will greatly enhance laser life.

**Power Output Danger Label**



**21 CFR 1040.10 Compliance**

Because of the small size of these devices, each of the labels shown are attached to the individual shipping container. They are illustrated here to comply with 21 CFR 1040.10 as applicable under the Radiation Control for Health and Safety Act of 1968.