


# Wasatch Photonics

Ultimate Diffraction Gratings


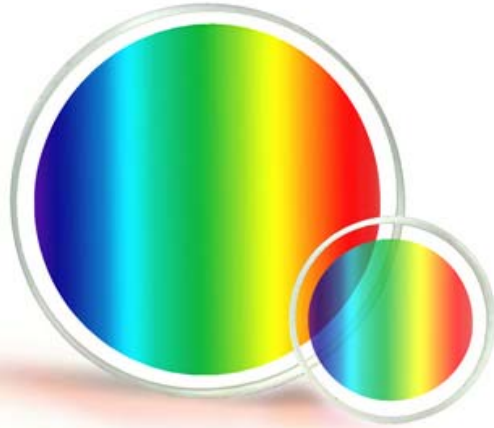


## VOLUME PHASE HOLOGRAPHIC TRANSMISSION GRATINGS

### 600 l/mm at 900 nm

These high-efficiency gratings work well in the NIR spectrum region around 900 nm. They are created by using coherent laser light to write the interference pattern in dichromated gelatin. After processing, the grating is capped with protective glass and then AR coated. The results are a grating with low scatter, high diffraction efficiency and low wavefront distortion. The grating is durable and can be cleaned using the same methods to clean AR coated optics. These gratings are available in 25.4 mm and 50.8 mm diameter sizes

Transmission Grating Geometry

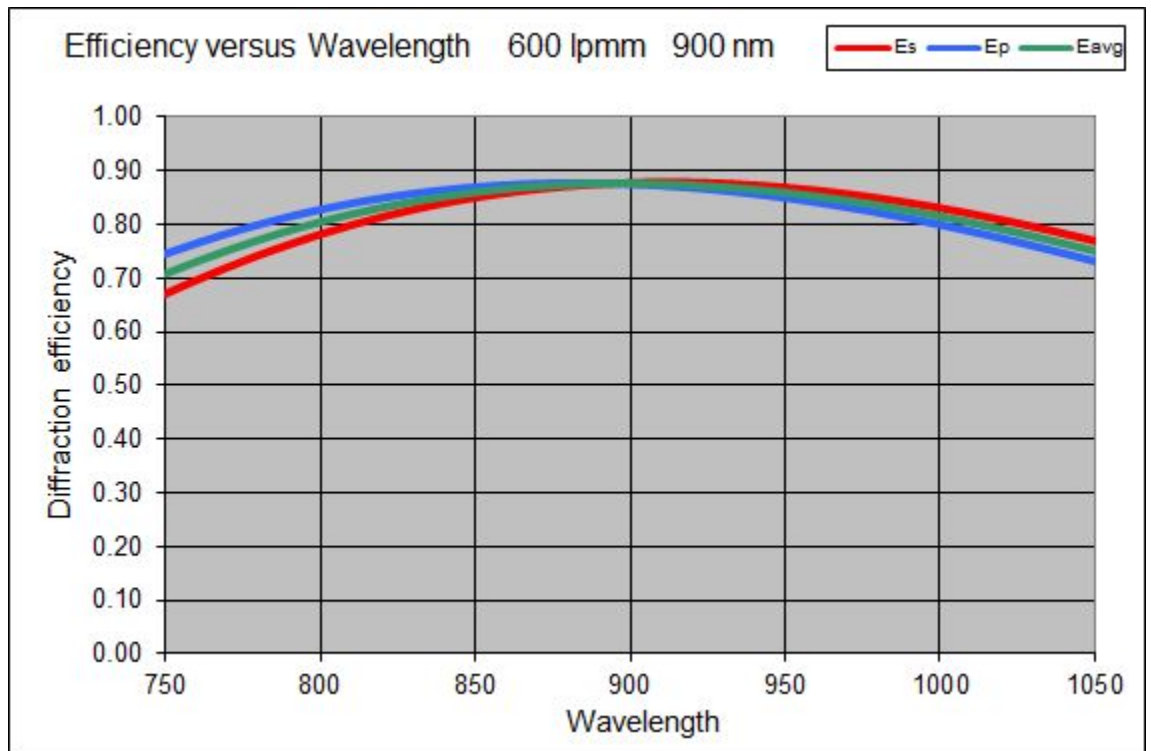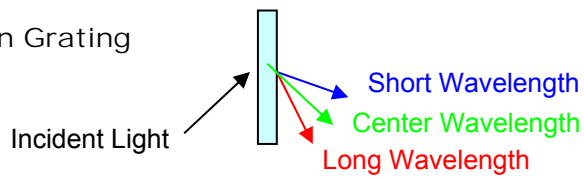

**Kokyo**  
株式会社光響

住所：京都市下京区烏丸通四条下ル水銀屋町637番地 第5長谷ビル2階

Email : [info@symphotony.com](mailto:info@symphotony.com)

TEL : 070 - 6925 - 5558

Web : <http://www.symphotony.com/>

FAX : 075 - 320 - 1604

600 l/mm gratings at 900 nm

# SPECIFICATIONS

General	
Surface quality	60-40 scratch-dig
Diffracted Wavefront	$< \lambda/5$ rms @ 632.8 nm
Spatial Frequency	600 l/mm +/- 0.5 l/mm
CWL	900 nm
Angle of Incidence (AOI)	15.7° @ 900 nm
Thickness Tolerance	+/- 0.25
Diameter Tolerance	+0/-0.15
Chamfers	0.25-0.75 mm face width
Chamfers Angle/Tolerance	45° +/-15°
AR Coating	< 0.5% Reflection; 750 nm-1050 nm

25.4 mm gratings	
Substrate and Cover Glass	1.5 mm BK7 3 mm total thickness
Clear Aperture	20 mm
Dimensions	A = 25.4 mm B = 3 mm

50.8 mm inch gratings	
Substrate and Cover Glass	3 mm BK7 6 mm total thickness
Clear Aperture	45 mm
Dimensions	A = 50.8 mm B = 6 mm

