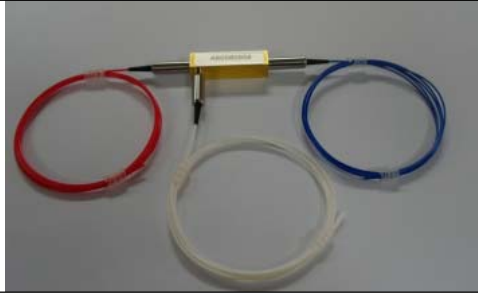



1064nm Polarization Insensitive Optical Circulator

Features	
High isolation & High Return Loss Low insertion loss & PDL	
Applications	
Fiber Laser Laboratory	

Specifications

Parameter \ Type	3 Port
Operating wavelength (nm)	1064
Bandwidth(nm)	±10
Isolation(dB)	≥20(Typ.25dB)
Insertion Loss (dB)	≤2.1(Typ 1.8)
PDL (dB)	≤0.2
Return loss (dB)	≥50
Cross Talk (dB)	≥45
Power handling (mW)	≤300
Fiber Type	HI1060
Operating temperature (°C)	0 ~ +70
Storage temperature (°C)	-40 ~ +85
Dimensions (mm)	34x8.4x8.4

Package Dimension

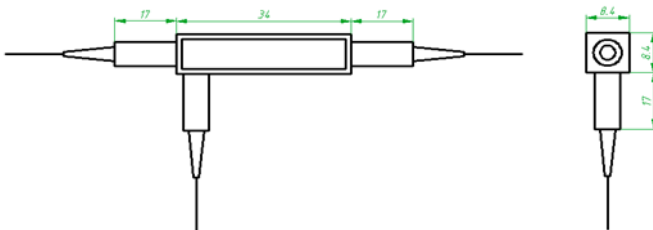

Ordering Information

CIR	Type	Wavelength	Pigtail Type	Length	Fiber Type	Connector	Package	
	3=3 Port	1064=1064	0=250um fiber 1=900um tube 3=3mm tube 2=2mm tube	bare loose loose loose	0.8=0.8m 1=1m	4=HI1060	NE=None FC=FC/UPC SC=SC/UPC FA=FC/APC SA=SC/APC ST=ST/UPC LC=LC/UPC xx=Others	34=34x8.4x8.4