


## In Line Fixed Optical Attenuator (FOA)

<b>Features</b>	
High precision Excellent Stability and Reliability	
<b>Application</b>	
Optical communication systems CATV Networks	

### Specifications

Parameter	In Line	
Wavelength (nm)	1064 ± 15	
Attenuation range (dB)	1dB, 3dB, 5 dB, 7dB, 10 dB, 15dB, 20dB,	
Attenuation precision (dB)	±10% Attenuate Value	
Pigtail Type	250um bare fiber	900um/2mm/3mm loose
Fiber	OFS980 or HI1060FLEX	
Package	Φ3×54	Φ3×54
Operating temperature (°C)	-20 ~ 75	
Storage temperature (°C)	-40 ~ 85	

### Package Dimensions

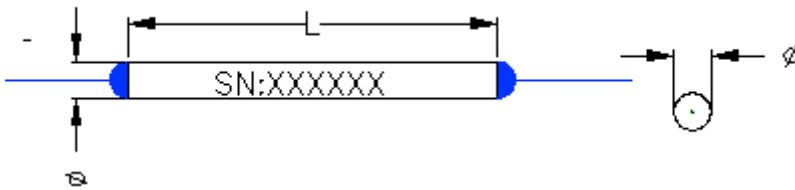

### Ordering Information

FOA	Type	Wavelength	Attenuation (dB)	Pigtail Type	Fiber Type	Length	Connector	Package
	I=In Line	1064	1=1 3=3 5=5 10=10 15=15 20=20 XX: Specify	250=250um bare fiber 900=900um loose tube 2000=2mm loose tube	4=OFS980 5=HI1060FL EX	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC MU=MU/UPC	3x54