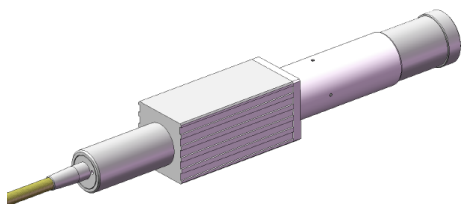



## 1064nm High Power Collimated Beam Output Isolator (10-30W)

<b>Features</b>	
Low Insertion Loss & PDL High Isolation Extinction Ratio High stability and reliability	
<b>Application</b>	
Fiber Laser	

### Specifications

Parameters	Non-PM fiber (HPCI)	PM fiber (HPMCI)
Center Wavelength ( $\lambda_c$ ) (nm)	1064	
Operating Wavelength Range(nm)	$\pm 10$	
Peak Isolation (dB)	30~35dB	
Isolation at 23°C (dB)	$\geq 25$ dB	
Transmission (%)	$\geq 90$ (Typ. 93%)	
Return Loss (dB)	$\geq 50$	
PDL (dB)	<0.15	--
Extinction Ratio (dB)	--	$\geq 20$ dB
Fiber Type	10/125,20/125,25/250 DC LMA fiber	PM10/125,PM20/125,PM25/250 DC LMA fiber
Nominal Output Beam Diameter (mm)	$5 \pm 1$ mm or Specify	
Optical Power	Average 10,20,30W or Specify Peak Power 10Kw, 20Kw	
Operating Temperature(°C)	-0 to +60	
Storage Temperature(°C)	-20 to +75	

### Package Dimensions

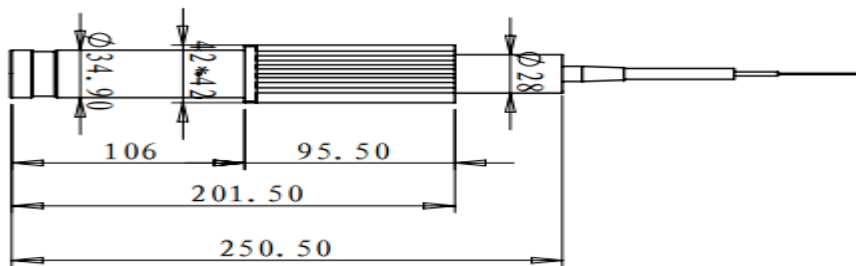

### Ordering Information

HPCI HPMCI	Wavelength	Working axis	Output beam diameter	Input Pigtail	Fiber	Input length	Power
	1064	F=Fast axis Blocked	8=8mm S=Specify	3=3mm loose tube 3AC=3mm Armored Cable 6AC=6mm Armored Cable	10/125DC 20/125DC S=Specify	2=2m S=Specify	20W 30W S=Specify