

1550nm 10mw DFB Coaxial Pigtailed Laser Diode with SMF


1550nm SM DFB fiber coupled LD

WSLP-1550-010m-9-DFB

Wavespectrum laser inc.

www.wavespectrum-laser.com


PARAMETER	SYMBOL	VALUE	UNIT
LD Reverse Voltage	V_r	2.0	V
PD Reverse Voltage	$V_{r(PD)}$	15	V
Operating Temperature	T_{op}	-10 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

<p>Features:</p> <ul style="list-style-type: none"> ● 1550nm ● DFB Laser Diode ● Built-in Monitor ● 9um Fiber Core ● 10mw output power ● Isolation Optional ● Coaxial/Receptacle package <p>Applications:</p> <ul style="list-style-type: none"> ● Test Equipments ● Optical Bidi Module and Optical Receiver ● Optical Transmitter of Analog Signal ● Optical Transmitter of Data Signal 			
Specifications	WSLP-1550-010m-9-DFB		
	Min	Type	Max
Center Wavelength@25°C	1530nm	1550nm	1570nm
Laser Type	DFB		
Output Power	----	10mW	----
Fiber Core	9um SM Fiber		
Threshold Current (Typ.) I_{th}	----	12mA	----
Operating Current	----	66mA	----
Operating Voltage	----	1.4V	----
Spectral Width(nm@20dB)	----	0.23	----
SMRS	----	35dB	----
Rs(ohms)	----	12.98	----
Monitor Current	0.1mA	----	----
PD Capacitance	----	10pF	15pF
PD Dark Current	----	----	0.1uA
Slope	----	0.38W/A	----
Package Style	Pigtail/Receptacle		
Data Rate	----	2.0Gb/s	----
Fiber Connector	FC/SC/ST/LC/MU		


Modulation Frequency upto 2GHz



Coaxial Package View

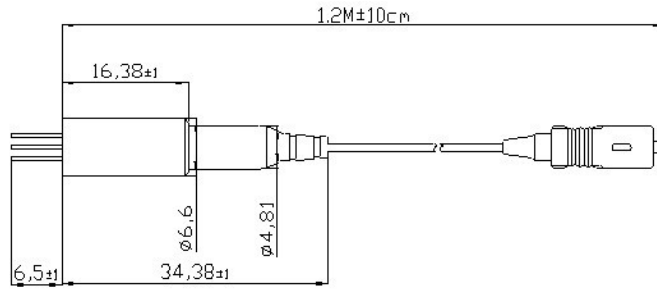

Bottom View



TYPE A
 PIN ASSIGNMENT:

1	PD Cathode
2	PD Anode
3	LD Anode, GND
4	LD Cathode

Electrically shorten LD module and store in non-extreme conditions.
 Suggest using the constant current power supply.



Please contact us:

Website: www.wavespectrum-laser.com (for more detailed information)

Email: info@wavespectrum-laser.com (for inquiry about this product)

