Kokyo 株式会社光響
住所：京都市下京区烏丸通四条下ル水銀屋町637番地 第5長谷ビル2階
Email : info@symphotony.com TEL : 070 - 6925 - 5558
Web : http://www.symphotony.com/ FAX : 075 - 320 - 1604

940nm 10W Fiber Coupled Laser Diode (LD) Module with HHL Package | Aiming Beam

940nm|10W~12W Power| HHL Package| 200um Fiber Core| High Power LD|TEC Cooling

WSLB-940-010-H **Wavespectrum Laser, Inc.** **www.wavespectrum-laser.com**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10~+30	℃
Storage Temperature	T_{stg}	-20 ~ +80	℃
Lead soldering temperature (10 sec.)	T_{ls}	260	℃

Features:

- 940nm
- **Built-in** TEC Cooling Optional
- Red Aiming Beam Optional
- Photodiodes Optional
- Stainless Steel Armor Optional

Applications:

- Medical laser treatment
- Pumping
- Others

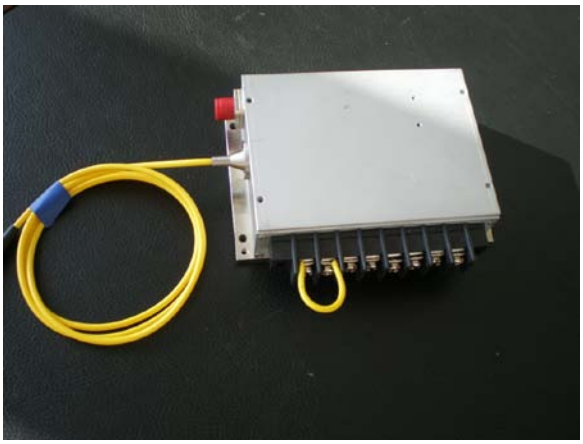

Specifications	WSLB-940-010-H		
	Min.	Type	Max.
Center Wavelength@25℃	±3nm	940nm	±10nm
Spectral Width (FWHM)	----	3nm	----
Output Power	----	10W	----
Temperature Coefficient of Wavelength	----	0.3nm / °C	----
Threshold Current (Typ.)	----	350mA	----
Operating Current (Typ.)	----	4.5A	----
Operating Voltage		7V	
Cooling	TEC Cooling Optional		
Fiber Core Diameter	<300um		
Fiber Numerical Aperture	0.22		
Fiber Length	100cm		
Connector Type	SMA905/ST/FC		
Package	P2 Package		
Red Aiming Beam	Optional (2mw@650nm)		

Wavespectrum Laser,Inc.
www.wavespectrum-laser.com
wavespectrumlaser@gmail.com

Package View

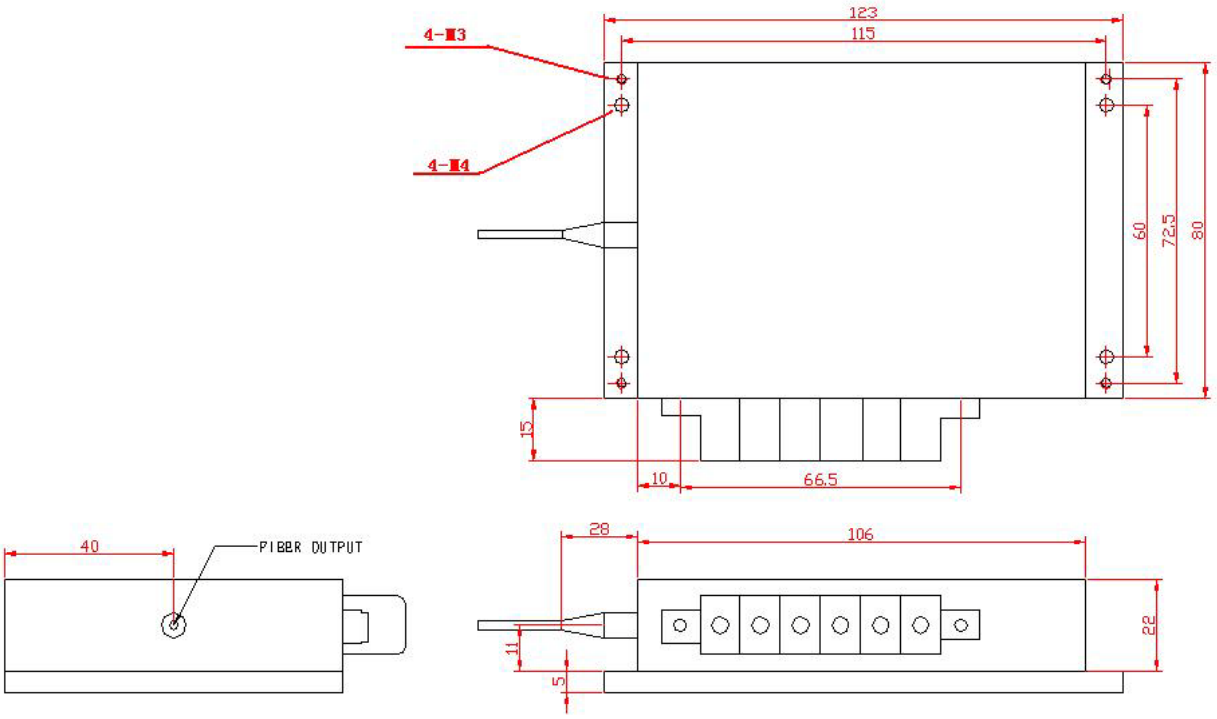

PIN	1	2	3	4	5	6
	LD(+)	**LD(-)**	**RT**	**RT**	**TEC(-)**	**TEC(+)**

Wavespectrum offer Customized 940nm Fiber Coupled LD.

Please let me know your special request:

- **Customized Output Power**
- **Customized Fiber**
- **Customized Fiber Connector**

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

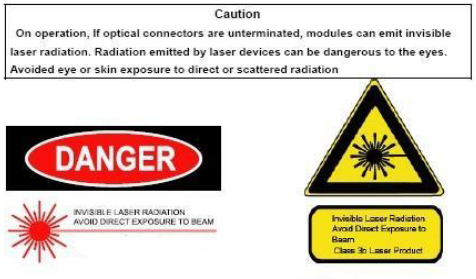

Wavespectrum Laser,Inc.
www.wavespectrum-laser.com
wavespectrumlaser@gmail.com