


## MPO Patchcord

### Specifications:

Parameter	Value
Connector Type	FC, SC, LC, MPO
Fiber Type	SM 9/125 G652D   50/125 (OM2, OM3, OM4), 62.5/125
Insertion loss (dB)	≤0.7 (Standard) ; ≤0.5 (Low Loss)
Return loss (dB)	≥40 (UPC) , ≥60 (APC) ≥20 (MM)
Durability	≤0.2 (dB)
Operating temperature (°C)	-40 ~ + 85
Cable type	Round, Oval,
Length	1m, 2m, 3m, 10m, customize

Housing color—Blue(SM/UPC),Green(SM/APC),Beige(MM),Aqua

### Polarity A: Straight Through

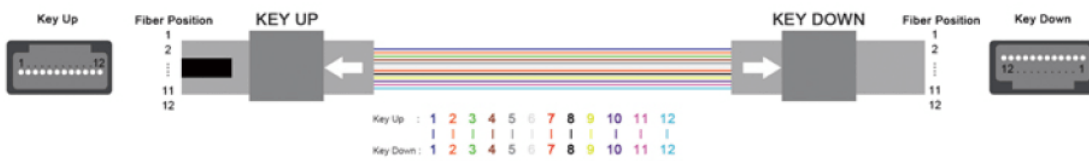

### Package



### Ordering Information

MPO	Type	Connector (End1)	Connector (End2)	Tested Wavelength	Method	Cable Pigtail Type	Fiber Type	Length	Ferrule
	F=Female-Female M=Male-Male D=Female-Male	8=MPO 8 Line 12=MPO 12 line 24= MPO 24 Line	8=MPO 8 Line 12=MPO 12 Line 24= MPO Line LC=LC/UPC LA=LC/APC SC=SC/UPC FC=FC/UPC	1550 850	S=Stright Through C=Corss	R=Round O=Oval	1=G652D SMF-28e 3=50/125 OM3 4=50/125 OM4	1=1m X=Specifity	S=Standard L=Low Loss