


ENGRAVED ARROW INDICATES
SUGGESTED DIRECTION
OF LIGHT TRANSMISSION

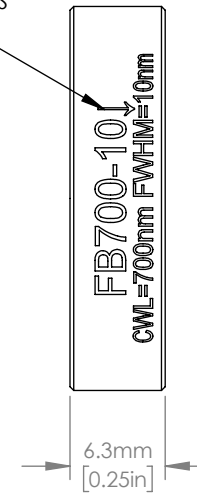

NOTES/SPECIFICATIONS:

1. CENTER WAVELENGTH (CWL): 700nm \pm 2nm
2. FULL WIDTH HALF MAX(FWHM): 10nm \pm 2nm (NOMINAL)
3. TRANSMISSION MINIMUM: 50%
4. BLOCKING: 200nm-1200nm > OD4
5. SURFACE/COATING QUALITY: 80-50 SCRATCH-DIG
6. OPERATING TEMPERATURE: -50°C TO +80°C
7. OPTIMUM OPERATING TEMPERATURE: 23°C
8. EDGE TREATMENT: MOUNTED IN BLACK ANODIZED ALUMINUM RING

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com	
NAME	DATE	Ø 25.4mm BANDPASS FILTER CWL=700nm, FWHM=10nm		
DRAWN	CR	25/MAY/12	MATERIAL SCHOTT BOROFLOAT & SODA LIME	
APPROVAL	DD	16/AUG/12	ITEM #	APPROX WEIGHT
COPYRIGHT © 2012 BY THORLABS			FB700-10	27 g
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			REV	C