


FIBER SPECIFICATIONS*						
ITEM #	OPERATING WAVELENGTH	MODE FIELD DIAMETER	CLADDING DIAMETER	COATING DIAMETER	CUTOFF WAVELENGTH	NA
780HP	780 - 970 nm	5.0 ± 0.5 μm @ 850 nm	125 ± 1 μm	245 ± 15 μm	730 ± 30 nm	0.13

\*SPECIFICATIONS BASED ON BARE-FIBER DATA

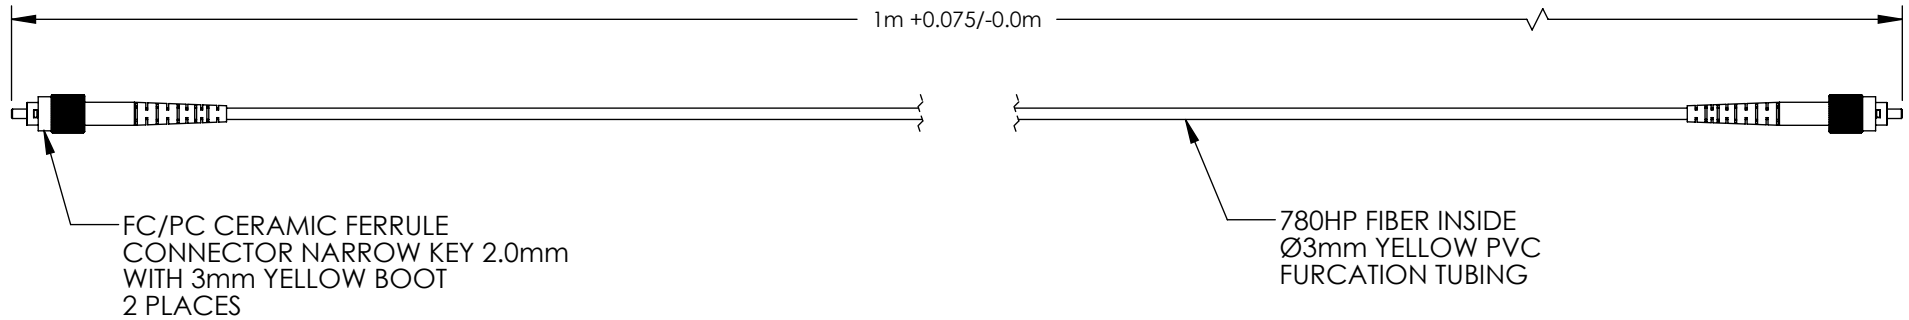

INCLUDED BUT NOT SHOWN:  
 • 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY  
 NOT FOR MANUFACTURING PURPOSES

**Kokyo**

株式会社光響

Email : [info@symphotony.com](mailto:info@symphotony.com)

Web : <https://www.symphotony.com/>

DRAWING PROJECTION			<b>THORLABS</b> www.thorlabs.com	
NAME	DATE	1m, 780nm, FC/PC TO FC/PC CABLE		
DRAWN	KH	07/JUL/11	MATERIAL	
APPROVAL	BAG	02/DEC/19	N/A	
COPYRIGHT © 2019 BY THORLABS			ITEM #	APPROX WEIGHT
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			P1-780A-FC-1	0.02 kg

REV E