


FIBER SPECIFICATIONS*						
FIBER TYPE	OPERATING WAVELENGTH	CUTOFF WAVELENGTH	MODE FIELD DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA
SM980-5.8-125	980 - 1550 nm	870 - 970 nm	5.3 - 6.4 μm @ 980 nm	125 \pm 1.0 μm	245 \pm 15 μm	0.13 - 0.15

*SPECIFICATIONS BASED ON BARE-FIBER DATA

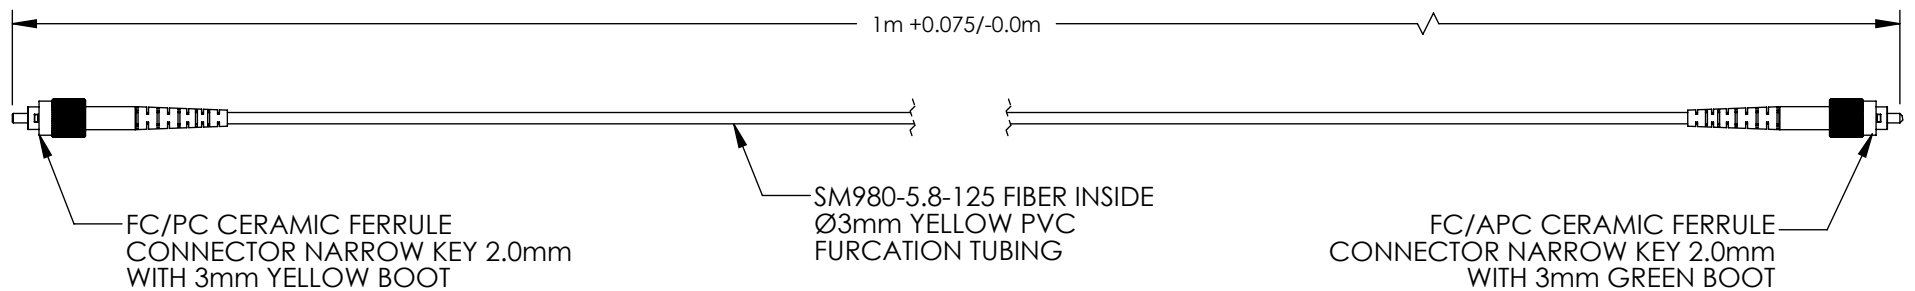

Kokyo

株式会社光響

Email : info@symphotony.com

Web : <https://www.symphotony.com/>

INCLUDED BUT NOT SHOWN:
 • 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
 NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com	
NAME	DATE	1m 980/1064/1550 nm FC/PC TO FC/APC CABLE		
DRAWN	KB	28/JUL/10	MATERIAL	
APPROVAL	BAG	02/DEC/19	N/A	
COPYRIGHT © 2019 BY THORLABS			ITEM #	APPROX WEIGHT
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			P5-980A-PCAPC-1	12 g
			REV	E