


FIBER SPECIFICATIONS*						
FIBER TYPE	OPERATING WAVELENGTH	CUTOFF WAVELENGTH	MODE FIELD DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA
SM600	633 - 780 nm	500 - 600 nm	3.6 - 5.3 μm @ 633 nm	125 \pm 1.0 μm	245 \pm 15 μm	0.10 - 0.14

*SPECIFICATIONS BASED ON BARE-FIBER DATA

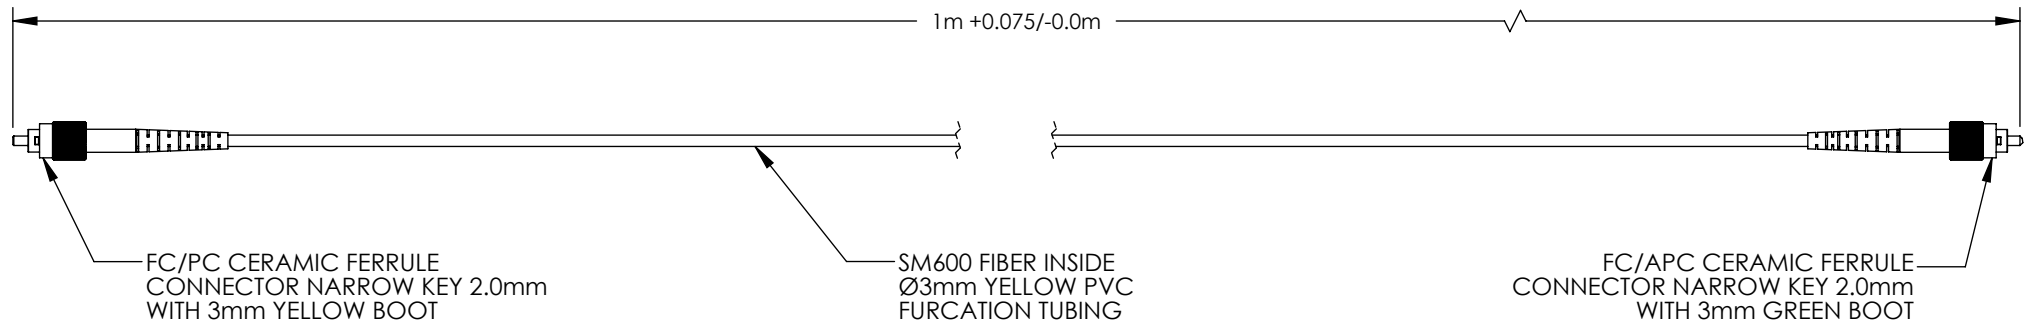

Kokyo

株式会社光響
 Email : info@symphotony.com
 Web : <https://www.symphotony.com/>

INCLUDED BUT NOT SHOWN:
 • 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
 NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION					THORLABS www.thorlabs.com	
	NAME	DATE	1m, 633 nm, FC/PC TO FC/APC CABLE			
DRAWN	KB	28/JUL/10	MATERIAL			
APPROVAL	BAG	02/DEC/19	N/A		REV F	
COPYRIGHT © 2019 BY THORLABS			ITEM #	APPROX WEIGHT		
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			P5-630A-PCAPC-1	12 g		