


FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FG105LCA	105 +1/-3 μm	125 +1/-2 μm	250 \pm 10 μm	0.22 \pm 0.02	400 to 2400 nm

*SPECIFICATIONS BASED ON BARE FIBER DATA

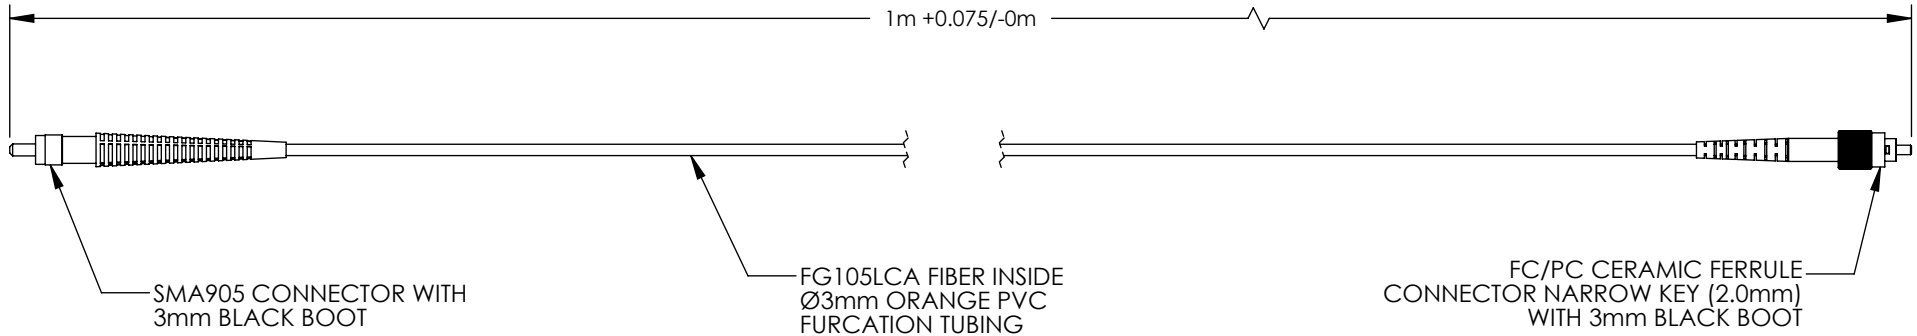

INCLUDED BUT NOT SHOWN:

- 1 RUBBER SMA DUST CAP
- 1 PLASTIC DUST CAP

Kokyo

株式会社光響

Email : info@symphotony.com

Web : <https://www.symphotony.com/>

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			THORLABS www.thorlabs.com	
NAME	DATE	1m, 105 μm 0.22 NA SMA TO FC/PC CABLE		
DRAWN	KH	28/JUL/11	MATERIAL	
APPROVAL	HC	19/APR/22	N/A	
COPYRIGHT © 2019 BY THORLABS			ITEM #	REV
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			M18L01	H
			APPROX WEIGHT	
			0.02 kg	