

➤ M-QCS High Power Collimator



Product Characteristics Performance

Parameters	Unit	Values			
Center Wavelength	nm	1060	1550	2000	
Operating Wavelength Range	nm	±30	±50	±50	
Min. Transmission	%	93			
Beam Diameter	mm	5.0±0.5			
Ellipticity	%	>95			
Far Field Divergence(1064nm)	mrad	0.5			
Min. Return Loss	dB	35			
Max. Optical Power	W	100	150	200	300
Fiber Type	/	20/400 DCF Fiber, NA0.06			
Tensile Load	kg	2			
Armoured Length(A)	m	5		10	
Fiber Length(B)	m	2			
Operating Temperature	℃	-5 to +65			
Storage Temperature	℃	-40 to +85			
Package Dimensions	mm	Dia14.0X145.0			

Ordering Information

M-QCS-①①-②②-③③-④④-⑤⑤⑤-
⑥⑥-⑦⑦⑦-⑧⑧

①①: Wavelength
06-1064nm
55-1550nm
2U-2000nm

②②: Beam Diameter
05-5.0±0.5mm
S-Specify

③③: Far Field
Divergence
05-0.5 mrad
S-Specify

④④: Fiber Core Type
20-20um
S-Specify


⑤⑤⑤: Optical Power
100-100W
300-300W
S-Specify

⑥⑥: Connector Type
N-None
S-Specify

⑦⑦⑦: Fiber Jacket Type&Length
A50-3mm Armoured Cable&5.0m
B100-8mm Armoured Cable&10.0m
S-Specify

⑧⑧: Bare Fiber Length
20-2.0m
S-Specify

Package Dimensions

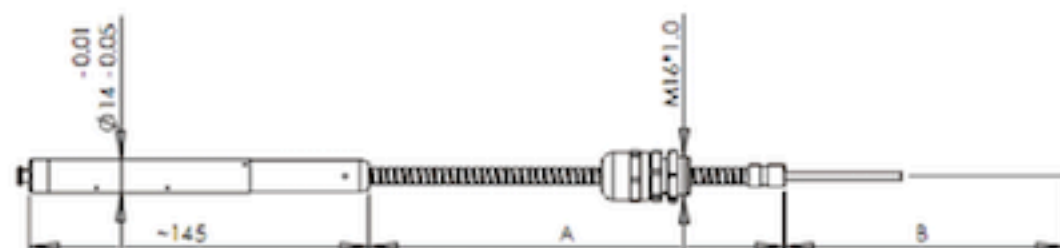

Kokyo
株式会社光響

住所: 京都市下京区烏丸通四条下ル水銀屋町637番地 第5長谷ビル2階

Email: info@symphotony.com

TEL: 070-6582-2430

Web: <http://www.symphotony.com/>

FAX: 075-320-1604