

SPECIALTY FIBER THULIUM DOPED FIBER

Tm - DOPED
SINGLE MODE FIBER

Kokyo


株式会社 光響

Email : info@symphotony.com

Web : <https://www.symphotony.com/>

ARTICLE TDF-SM-10/125

TDF-SM-10/125 series is specially designed for highly efficient core pumping at 1550-1600 nm.

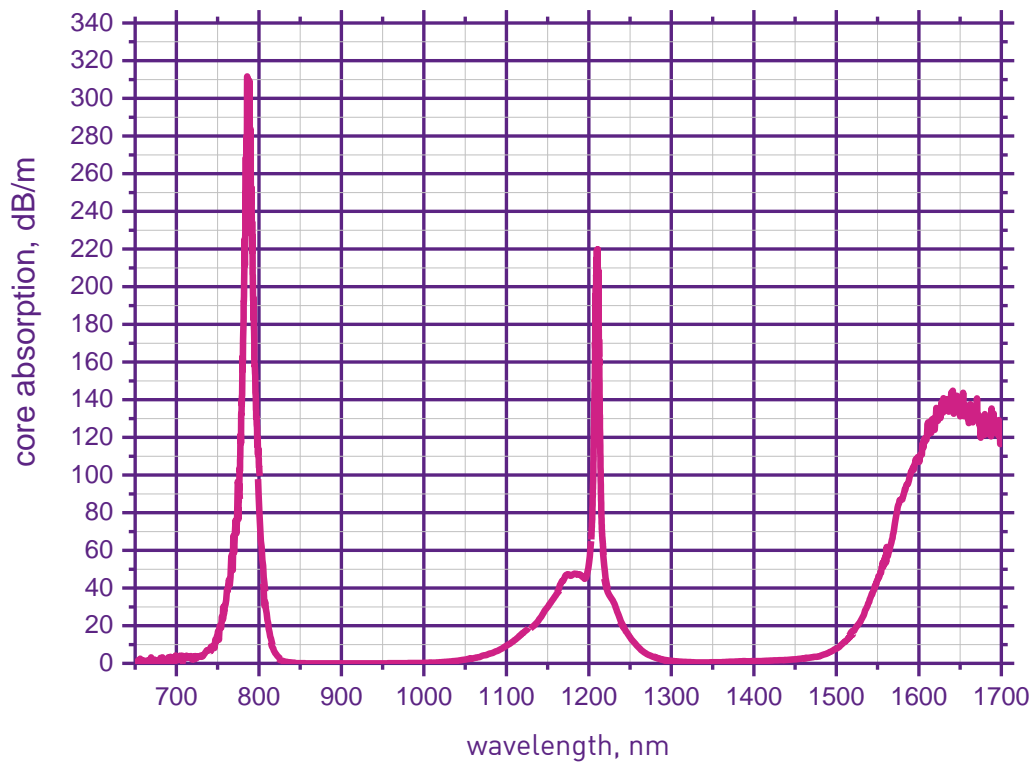

FIBER SPECIFICATIONS	TDF-SM-10/125
Core diameter, μm	10 ± 1.0
Clad diameter, μm	125 ± 3
Core NA	0.18 ± 0.02
Cutoff wavelength, μm	1.9 ± 0.05
Core absorption (1568 nm), dB/m	> 60

Other parameters are available on the request