


Mini Size 1310/1550nm Fused WDM

Features	
High Isolation Low Insertion Loss High Reliability	
Applications	
CATV System Access Network	

Specifications

Type	WDM	
Operating wavelength (nm)	1310 and 1550	
Operating bandwidth (nm)	± 15	
Grade	P	A
Insertion loss (dB)	≤ 0.35	≤ 0.4
Isolation (dB)	≥ 16	≥ 15
PDL (dB)	≤ 0.15	≤ 0.20
Directivity (dB)	≥ 55	
Operating temperature (°C)	-40 ~ +85	
Fiber	SMF-28e	
Configuration	1×2 or 2×2	
Pigtail type	250um bare fiber	
Package Size	$\Phi 2.4 \times 30$	

Package Dimensions

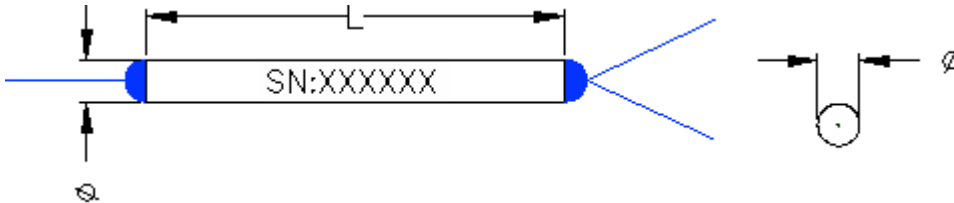

Ordering Information

WDM	Grade	Port	Wavelength	Pigtail	Fiber	Length	Connector	Package
	A=A grade P=P grade	1x2 2x2	1310/1550	5=250um bare fiber	0=SMF-28e	1=1m S=Specify	00=none FC,SC,LC,ST MU/UPC,APC	2.4x30