

## Multi-Mode Filter WDM


<b>Features</b>	
Low Insertion Loss High Isolation High Stability and reliability	
<b>Application</b>	
Multi-mode fiber communication systems LAN	

### Specifications

Parameter	Type	850/1310
Operating wavelength (nm)		850 and 1310
Operating bandwidth (nm)		±50
Pass channel insertion loss (dB)		≤0.7
Reflection channel insertion loss (dB)		≤0.6
Pass channel isolation (dB)		≥30
Reflection channel isolation (dB)		≥15
Directivity (dB)		≥35
Return loss (dB)		≥30
PDL (dB)		≤0.1
Wavelength thermal stability (nm/°C)		≤0.003
Insertion loss thermal stability(dB/°C)		≤0.005
Power handling (mW)		≤500
Operating temperature (°C)		0 ~ +70
Storage temperature (°C)		-40 ~ +85
Fiber type		50/125 or 62.5/125um
Dimensions (mm)		φ5.5×L35

\*The above specification are for devices without connector.

### Package Dimensions

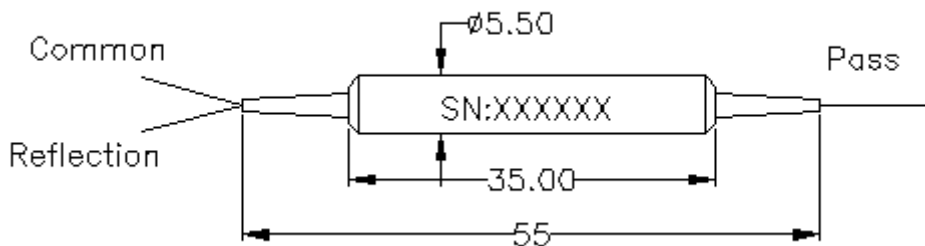

### Ordering Information

FWDM	Port Type	Wavelength	Pigtail Type	Fiber Type	Length	Connector
	1x2	850T/1310R 1310T/850R	250=250um fiber 900=900um tube 3000=3mm tube	bare loose loose	2=50/125 3=63.5/125	1= 1m NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC XX=Other