

Optical Fiber Mirror


Features	
Low Insertion Loss	
Compact Size	
Environmental Stability	
Application	
EDFA	
DWDM System	
Fiber Instruments	
Fiber Sensor	

Specifications:

Parameter	Values
Operating Wavelength (nm)	1310, 1480, 1550
Operating Bandwidth (nm)	±30
Insertion loss (dB)	≤0.5 (Typ. 0.3)
PDL (dB)	≤0.05
PMD (ps)	≤0.05
Power handling (mW)	≤500
Fiber Type	SMF-28e
Operating temperature(□)	-5 ~ +70
Storage temperature(□)	-40~ +85
Package dimensions(mm)	Φ4.5x25

Above specification are for devices without connector ,For device with connector, IL is 0.3dB higher,RL is 5 dB lower.

Package Dimensions:

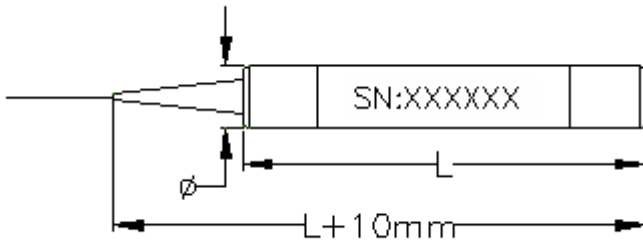

Ordering Information:

OFM	Wavelength	Pigtail Type	Fiber Type	Length	Connector	Size
	1310 1550	250= 250um bare fiber 900= 900um loose tube	1=SMF-28e	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC ST=ST/UPC LC=LC/UPC XX=Other	Φ4.5x25