





**QPHOTONICS, LLC**

3830 Packard Road,  
 Suite 170,  
 Ann Arbor, MI 48108,  
 USA

Phone: 734-477-0133  
 Fax: 734-477-0166  
 Email: info@qphotonics.com  
 http://www.qphotonics.com

<b>MODEL</b>	QFBGLD-1122-400
<b>PART NUMBER</b>	SAMPLE


Parameter	Value	Units
Internal Temperature	25	°C
Thermistor Resistance	10.0	kΩ
Optical Output Power	402	mW
Threshold Current	56	mA
Operating Current	614	mA
<b>Maximum Operating Current</b>	<b>675</b>	<b>mA</b>
Operating Voltage	1.67	V
Monitor Current	0	mA
Center Wavelength	1121.8	nm
Spectral Width	0.24	nm

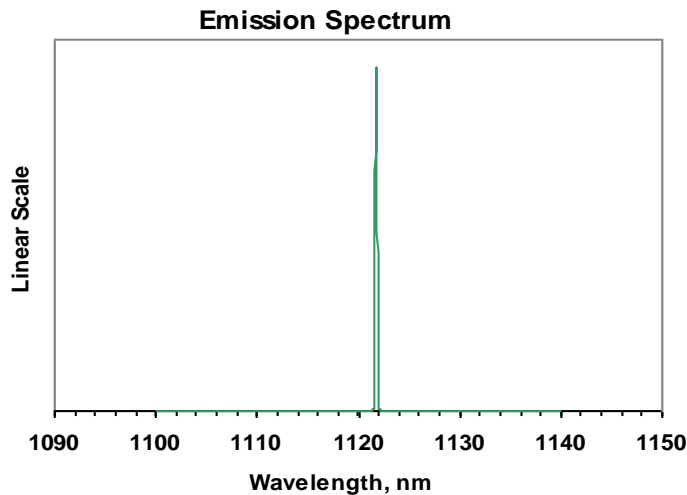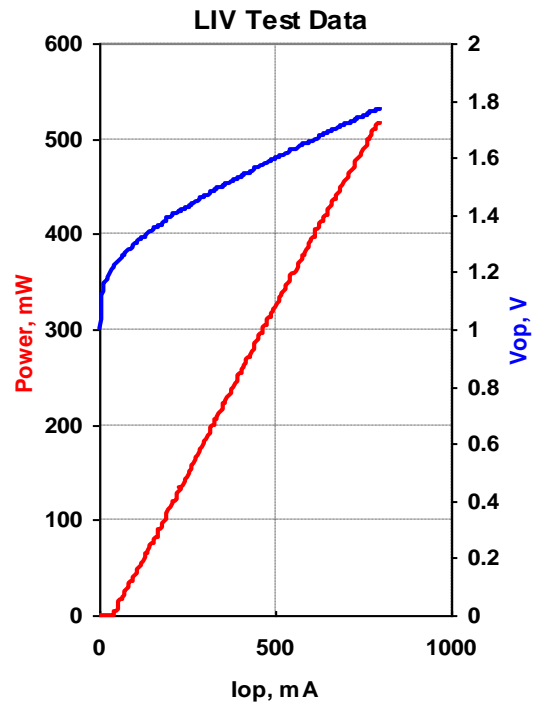

PER 23dB (PM fiber optiona only)

<b>Fiber Type</b>	<b>PM980</b>
<b>NA</b>	<b>0.13</b>
<b>Connector</b>	<b>Optional</b>

Pin	Connection
1	TE Cooler (+)
2	Thermistor
3	PD Anode (-)
4	PD Cathode (+)
5	Thermistor
10	LD Anode (+)
11	LD Cathode (-)
14	TE Cooler (-)

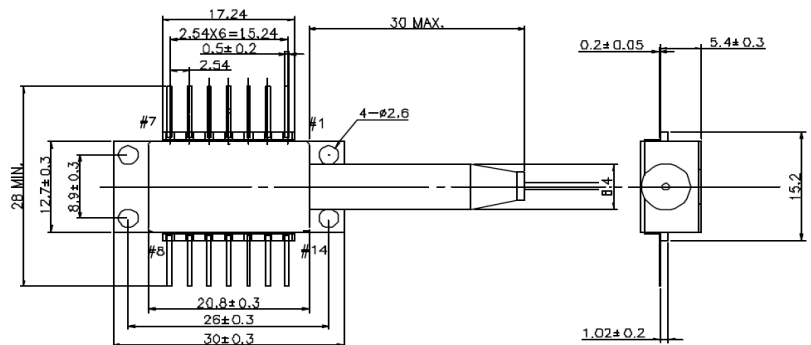

**TOP VIEW**

<b>Operator</b>	NA
<b>Date</b>	