


Single Mode Manual Variable Optical Attenuator (MVOA)

Features	
High precision Wide attenuation range Low Insertion Loss Compact size	
Application	
Optical communication systems test Optics lab use	

Specifications:

Parameter \ Type	850
Wavelength (nm)	850 ± 20
Attenuation range (dB)	0.8~ 40
Insertion Loss (dB)	≤0.8
Return loss (dB)	≥50
Fiber Type	HI780
Adjustment Precision (dB)	0.02
PDL (dB)	≤0.15
Operating temperature (□)	0 ~ +70
Storage temperature (□)	-40 ~ +85
Dimension (mm)	26 x 18 x 8

Package Dimensions

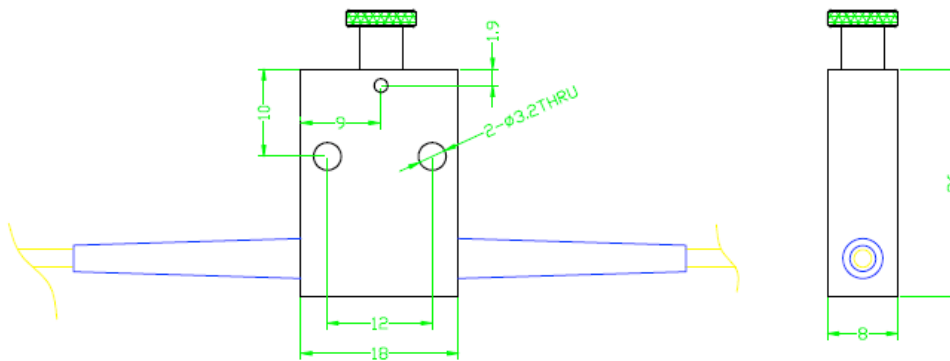

Ordering Information

MVOA	Wavelength	Adjustment Type	Pigtail Type	Fiber Type	Length	Connector
	850	1= Hand adjustment	900=900um tube 2000=2mm tube 3000=3mm tube	7=HI780	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC XX=Other