


Single Mode Manual Variable Optical Attenuator (MVOA)

Features	
High precision Wide attenuation range Low Insertion Loss Compact size	
Application	
Optical communication systems test Optics lab use	

Specifications:

Parameter \ Type	1310	1550	1310/1550	1064
Wavelength (nm)	1310 ± 40	1550 ± 40	1310 ± 40 & 1550 ± 40	1064 ± 20
Attenuation range (dB)	0.6 ~ 60	0.6 ~ 60	0.8 ~ 60	0.8~ 40
Insertion Loss (dB)	≤0.6	≤0.6	≤0.8	≤0.8
Return loss (dB)	≥50			≥50
Fiber Type	SMF-28e			HI1060
Adjustment Precision (dB)	0.02			
PDL (dB)	≤0.15			
Operating temperature (□)	0 ~ +70			
Storage temperature (□)	-40 ~ +85			
Dimension (mm)	26 x 18 x 8			

Package Dimensions

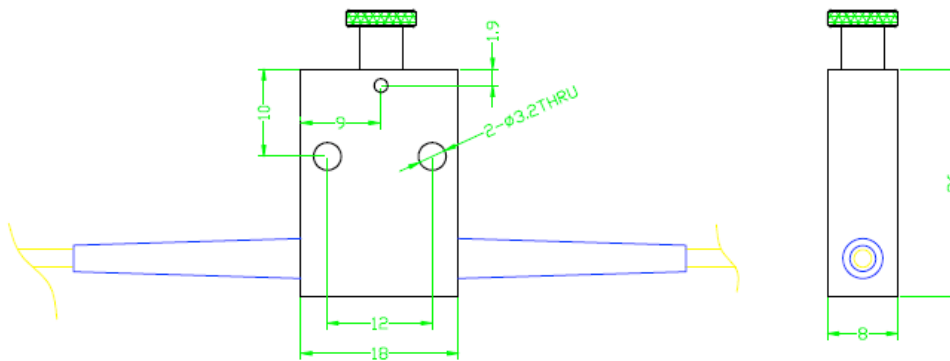

Ordering Information

MVOA	Wavelength	Adjustment Type	Pigtail Type	Fiber Type	Length	Connector	
	1064 1310 1550 1310/1550	1= Hand adjustment	900=900um tube 2000=2mm tube 3000=3mm tube	loose loose loose	1=SMF-28e 4=HI1060	1= 1m	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC LA=LC/APC MU=MU/UPC XX=Other