


## colorPol® Polarizer

### colorPol® VIS 500 BC3 CW01

Spectral range	VIS
Wavelength range with <b>contrast &gt; 1 000 : 1</b> <sup>(1)</sup>	475 to 625 nm
Transmittance (antireflection coating, 0° incident angle)	> 58 % up to 90 %
Filter thickness (laminated) <sup>(2)</sup>	1,7 ± 0,2 / 2,0 ± 0,2 mm
Acceptance angle (coating reference for 0°)	± 20°
Polarization axis	< 0.5° to edge
Operating temperature	-20 to +120 °C
<sup>(1)</sup> contrast: ratio of parallel to perpendicular transmittance	Date: 07.02.2013
<sup>(2)</sup> other thicknesses on request	

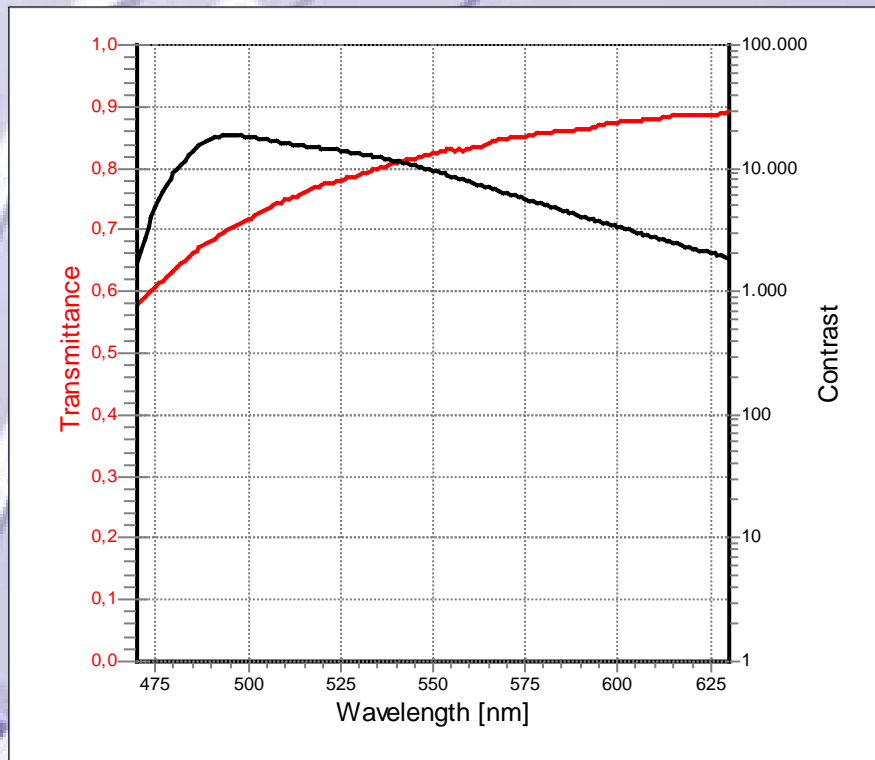

## CODIXX AG

Steinfeldstraße 3  
 D-39179 Barleben  
 Germany

Phone: +49 39203 963 0  
 Fax: +49 39203 963 33  
 Email: [colorpol@codixx.de](mailto:colorpol@codixx.de)  
 Internet: [www.codixx.de](http://www.codixx.de)

Version 1.4 – 12/09/2004