


1x2(2x2) Fused PM Fiber Standard Coupler

Features	
Low Excess loss & Low Insertion Loss High Extinction Ratio High stability and reliability	
Application	
Optical Amplifier, Power Monitoring Coherent Communication Fiber Gyroscope/ Sensor	

Specification


Parameter	P grade	A grade	P grade	A grade
Central Wavelength (nm)	1310, 1550		630,780, 850 980, 1030, 1064, 2000	
Bandwidth (nm)	±20			
Typ. Excess Loss (dB)	0.2	0.3	0.6	0.8
Max.Excess Loss (dB)	≤0.4	≤0.6	≤0.8	≤1.0
ER (dB)	≥20	≥17	≥18	≥16
Directivity (dB)	≥55			
Operating Temperature(°C)	-20 ~ +70			
Storage Temperature (°C)	-40 ~ +85			

For device with connector, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB lower. The default connector key is aligned to slow axis.

Package Information

Configuration	1x2 or 2x2		
Fiber length	0.8m, others on request		
Fiber Type	Panda fiber		
Pigtail type	250µm bare fiber	900µm loose tube	900µm/2mm/3mm loose tube
Dimensions(mm)	φ3.0×54	φ3.0×70 or φ3.0× 54	90x20x9.5

Package Dimensions

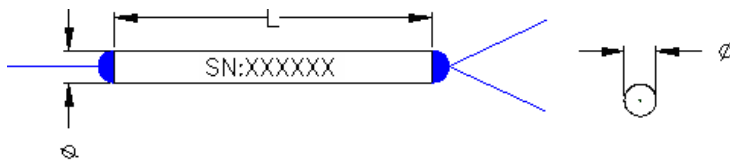

Ordering Information

CP	Type	Grade	Port Type	Wavelength (nm)	Coupling Ratio	Pigtail Type	Fiber Type	Length	Connector	Package
	PS=PM fused coupler	P A	1x2 2x2	630 780 850 980 1064 1310 1550 2000	1/99 2/98 3/97 50/50	0=250um bare fiber 1=900um loose tube 2=2mm loose tube 3=3mm loose tube	5=Panda fiber	0.8= 0.8m X:other	NE=None FA=FC/APC FC=FC/UPC SA=SC/APC SC=SC/UPC LC=LC/UPC XX=Other	54=3x 54 70=3. 0x70 90=9 0x20x 9.5 .